

Technical data sheet

SAIER LTE-Router

With the SAIER LTE router, all remote-capable SAIER devices can be connected to the SAIER Cloud SDDB.

Thanks to the vibration-proof plug connections, the robust housing and the extensive range of accessories, this router enables Internet connectivity even in demanding operating environments - worldwide.





Electrical data

Operating voltage:	100 ... 240 V
Frequency:	50 / 60 Hz
Input power:	9 W

Ambient conditions

Ambient temperature range:	+10 ... +45 °C
Environmental stress:	Conforms to DIN EN 60068-2-38

Dimensions

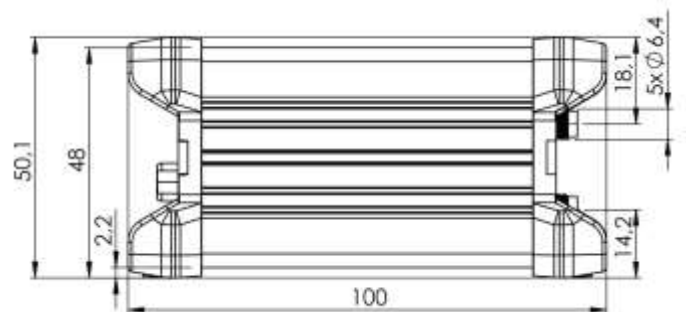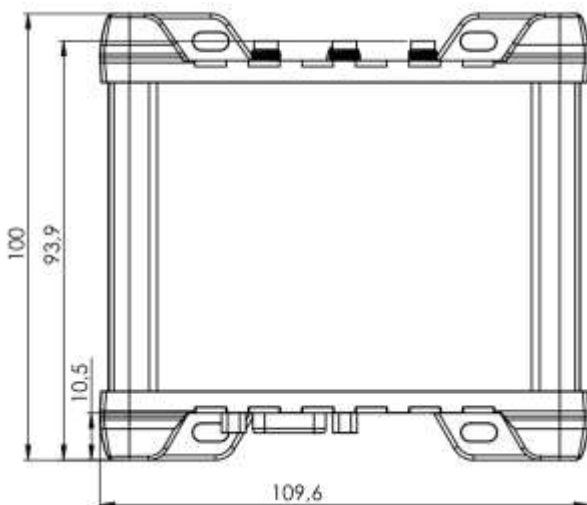

Scope of delivery

Designation

LTE-Router

Parts

Screw-on antennas
SIM Card
Connection cable 5m
RS485 bus
Connection resistor M12

Products

Art. no.

Designation

1004800 LTE-Router Europe
1005112 LTE-Router USA
1006156 LTE-Router worldwide

Scope of delivery

Scope of delivery + Power supply unit with Euro plug
Scope of delivery + Power supply unit with US plug
Scope of delivery + Power supply unit with universell plug

Accessories

1005428

Magnetic LTE antenna
LTE router connection (3m)



1006095

Universal plug-in power supply
for EU, US, UK, AU



1005920

RS485 Cabel mit 2x M12 socket for connecting multiple devices (5m)

1005921

RS485 extension cable M12 (10m)

1006074

RS485 cable connection LTE router (5m)